


unit : inch

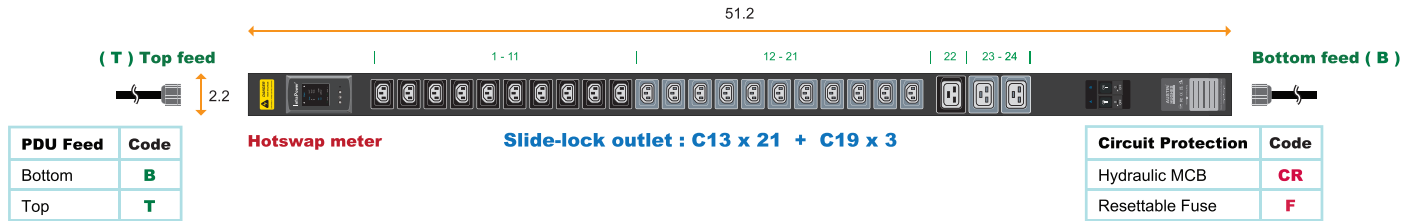

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model	V21L13/3L19-30A-MK/CR_L630/3B-1	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT	Circuit A : 12A max., C13 #1-11 + C19 #22 Circuit B : 12A max., C13 #12-21 + C19 #23-24
20A model	V21L13/3L19-20A-MK/CR_L620/3B-1	20A Inlet NEMA L6-20P 10ft Cordset 3W 12AWG UL SJT	Circuit : 16A max., C13 #1-21 + C19 #22-24

Slide Lock Outlet
Worldwide Patented
Black
Grey
White
Red
Blue
Green

Standard color
Single circuit : Black
Dual circuit : Black / Grey



Dimension & Weight

Product Dimension : 2.2W x 2.2D x 51.2H (inch)
Packing Dimension (2-in-1) : 4.3W x 10.6D x 70.6H (inch)
Net / Gross Weight : 12.4 lb / 15.3 lb

Specification

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity (non-condensing) : 8 to 95% RH
Chassis Material / Color : Steel / Black

Meter Features



Local Display : Hotswappable 1.8" Color LCD
Strip level : Current (A), Phase Voltage (V), Energy (kW),
Power Factor & Frequency (Hz)
Accuracy : Billing Grade +/-1%

Safety Certificates

CB : IEC 62368-1:2018
UL-US : UL 62368-1, 3rd Ed, 2021-10-22
UL-CA : CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22

EMC Certificates

FCC : FCC 47 CFR Part 15 Subpart B

Environment : RoHS, Reach & WEEE