


unit : inch

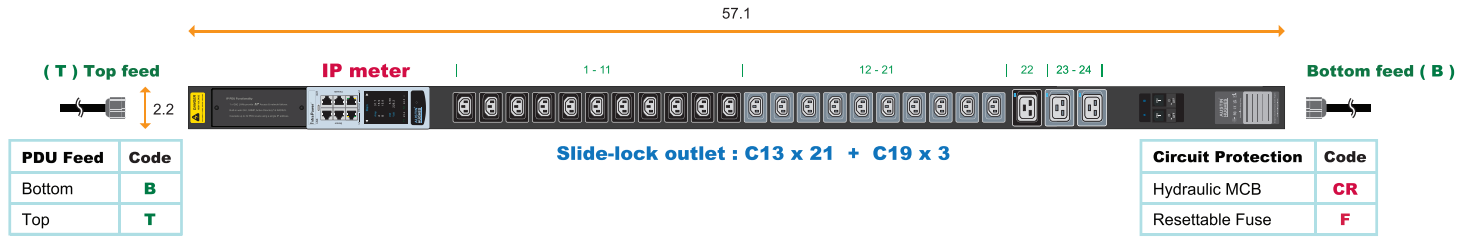

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color: Black

30A model	V21L13/3L19-30A-ZSi/CR_L630/3B-1	ZSi PDU	Outlet switching & monitoring	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT	Circuit A : 12A max., C13 #1-11 + C19 #22 Circuit B : 12A max., C13 #12-21 + C19 #23-24	
		V21L13/3L19-30A-ZS /CR_L630/3B-1	ZS PDU			Outlet switching
	V21L13/3L19-30A-Zi /CR_L630/3B-1	Zi PDU	Outlet monitoring			
	V21L13/3L19-30A-Z /CR_L630/3B-1	Z PDU	Circuit monitoring			
Slide-lock outlet : C13 x 21 + C19 x 3						
20A model	V21L13/3L19-20A-ZSi/CR_L620/3B-1	ZSi PDU	Outlet switching & monitoring	20A Inlet NEMA L6-20P 10ft Cordset 3W 12AWG UL SJT	Circuit : 16A max., C13 #1-21 + C19 #22-24	
		V21L13/3L19-20A-ZS /CR_L620/3B-1	ZS PDU			Outlet switching
		V21L13/3L19-20A-Zi /CR_L620/3B-1	Zi PDU			Outlet monitoring
		V21L13/3L19-20A-Z /CR_L620/3B-1	Z PDU			Circuit monitoring
Slide-lock outlet : C13 x 21 + C19 x 3						


Slide Lock Outlet	
Worldwide Patented	
	Black
	Grey
	White
	Red
	Blue
	Green

Standard color : Black
Single circuit : Black
Dual circuit : Black / Grey



Dimension & Weight	
ZSi / ZS / Zi PDU	
Product Dimension	: 2.2W x 2.7D x 57.1H (inch)
Packing Dimension (2-in-1)	: 4.3W x 10.6D x 70.1H (inch)
Net / Gross Weight	: 16.8 lb / 19.7 lb
Z PDU	
Product Dimension	: 2.2W x 2.2D x 57.1H (inch)
Packing Dimension (2-in-1)	: 4.3W x 10.6D x 70.1H (inch)
Net / Gross Weight	: 13.6 lb / 16.5 lb
Specification	
Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black

Meter Features	ZSi PDU	ZS PDU	Zi PDU	Z PDU
Local Display	✓	✓	✓	✓
Bank Measurement	✓	✓	✓	✓
Outlet Measurement	✓	✗	✓	✗
Outlet Control	✓	✓	✗	✗
Accuracy	✓	✓	✓	✓
IP Access	✓	✓	✓	✓
Protocol	✓	✓	✓	✓
Cascade	✓	✓	✓	✓
Console port x 1	✓	✓	✓	✓
USB-C port x 1	✓	✓	✓	✓
Sensor Port x 1	✓	✓	✓	✓



Safety Certificates	
CB	: IEC 62368-1:2018
UL-US	: UL 62368-1, 3rd Ed, 2021-10-22
UL-CA	: CAN/CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22
EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B
Environment : RoHS, Reach & WEEE	