

Drawing & Specification

1 Jul 2025


Version : V2

1-Phase Serial PDU

208V 20A / 30A : Slide-lock C13 x 24 + C19 x 6

InfraPower®

unit : inch

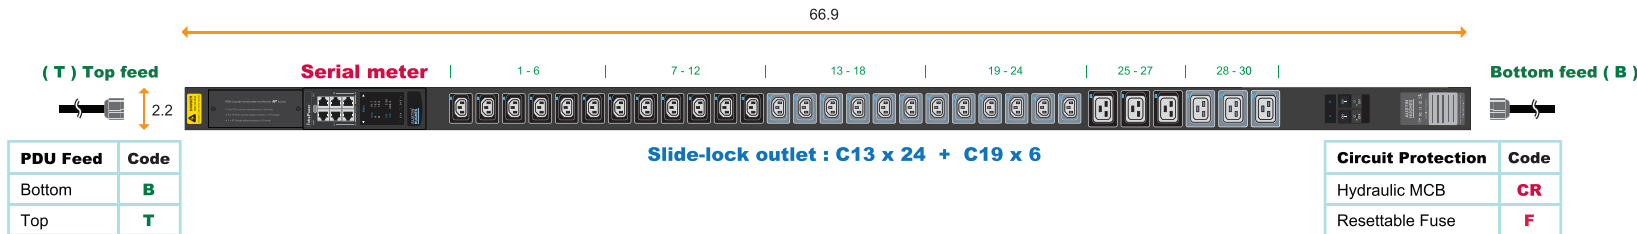

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model	V24L13/6L19-30A-MSi/CR_L630/3B-1	MSi PDU	Outlet switching & monitoring	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT	Circuit A : 12A max., C13 #1-12 + C19 #25-27 Circuit B : 12A max., C13 #13-24 + C19 #28-30 Outlet with LED only for Outlet switching PDU
	V24L13/6L19-30A-MS /CR_L630/3B-1	MS PDU	Outlet switching		
	V24L13/6L19-30A-Mi /CR_L630/3B-1	Mi PDU	Outlet monitoring		
	V24L13/6L19-30A-M /CR_L630/3B-1	M PDU	Circuit monitoring		
20A model	V24L13/6L19-20A-MSi/CR_L620/3B-1	MSi PDU	Outlet switching & monitoring	20A Inlet NEMA L6-20P 10ft Cordset 3W 12AWG UL SJT	Circuit : 16A max., C13 #1-24 + C19 #25-30 Outlet with LED only for Outlet switching PDU
	V24L13/6L19-20A-MS /CR_L620/3B-1	MS PDU	Outlet switching		
	V24L13/6L19-20A-Mi /CR_L620/3B-1	Mi PDU	Outlet monitoring		
	V24L13/6L19-20A-M /CR_L620/3B-1	M PDU	Circuit monitoring		

Slide Lock Outlet
Worldwide Patented
Black
Grey
White
Red
Blue
Green

Standard color
Single circuit : Black
Dual circuit : Black / Grey



Dimension & Weight

MSi / MS / Mi PDU

Product Dimension	: 2.2W x 2.7D x 66.9H (inch)
Packing Dimension (2-in-1)	: 4.3W x 10.6D x 80.4H (inch)
Net / Gross Weight	: 19.4 lb / 22.2 lb


M PDU

Product Dimension	: 2.2W x 2.2D x 66.9H (inch)
Packing Dimension (2-in-1)	: 4.3W x 10.6D x 80.4H (inch)
Net / Gross Weight	: 15.3 lb / 18.1 lb

Specification

Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black

Meter Features



	MSi PDU	MS PDU	Mi PDU	M PDU
Local Display	✓	✓	✓	✓
Bank Measurement	✓	✓	✓	✓
Outlet Measurement	✓	✗	✓	✗
Outlet Control	✓	✓	✗	✗
Accuracy	✓	✓	✓	✓
IP connection	✓	✓	✓	✓
Cascade	✓	✓	✓	✓
USB-C port x 1	✓	✓	✓	✓
Sensor Port x 4	✓	✓	✓	✓

IP dongle (option)

- Embedded Dual Gigabit LAN IP
- Dual LAN Network Failover
- Enterprise IP Authentication, LDAPv3 / LDAPS
- Active Directory®, RADIUS, 802.1x
- SNMP V2 V3, Web GUI, Modbus/TCP, RestAPI, LUA
- Wi-Fi connection via USB-C port

Safety Certificates

CB	: IEC 62368-1:2018
UL-US	: UL 62368-1, 3rd Ed, 2021-10-22
UL-CA	: CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22

EMC Certificates

FCC	: FCC 47 CFR Part 15 Subpart B
-----	--------------------------------

Environment : RoHS, Reach & WEEE



Design. Manufacturing. Global Services.

Copyright 2025 Austin Hughes Electronics Ltd. All rights reserved.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.