

Drawing & Specification

1 Jul 2025


Version : V2

1-Phase metered MK PDU

208V 20A/ 30A : Slide-lock C13 x 8 + C19 x 4

InfraPower®

unit : inch

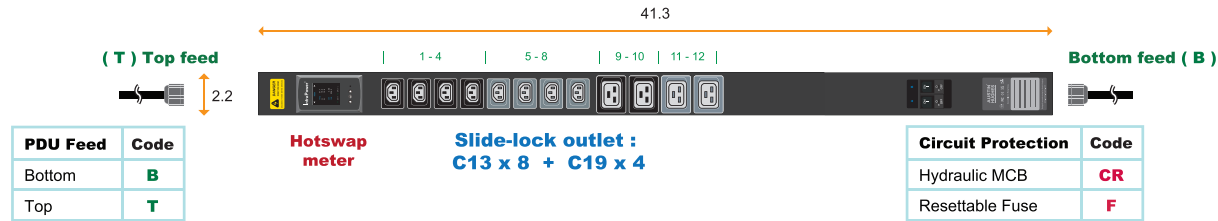

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model	V8L13/4L19-30A-MK/CR_L630/3B-1	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT	Circuit A : 12A max., C13 #1-4 + C19 #9-10 Circuit B : 12A max., C13 #5-8 + C19 #11-12
20A model	V8L13/4L19-20A-MK/CR_L620/3B-1	20A Inlet NEMA L6-20P 10ft Cordset 3W 12AWG UL SJT	Circuit : 16A max., C13 #1-8 + C19 #9-12

Slide Lock Outlet
Worldwide Patented
Black
Grey
White
Red
Blue
Green

Standard color
Single circuit : Black
Dual circuit : Black / Grey



REACH



Dimension & Weight

Product Dimension : 2.2W x 2.2D x 41.3H (inch)
Packing Dimension (2-in-1) : 4.3W x 10.6D x 54.8H (inch)
Net / Gross Weight : 10.7 lb / 13.1 lb

Specification

Operating Temperature : -5 to 60 °C
Storage Temperature : -25 to 65 °C
Operating Altitude : 0 to 2,000 m
Storage Altitude : 0 to 15,000 m
Humidity (non-condensing) : 8 to 95% RH
Chassis Material / Color : Steel / Black

Meter Features



Local Display : Hotswappable 1.8" Color LCD

Strip level : Current (A), Phase Voltage (V), Energy (kW),
Power Factor & Frequency (Hz)

Accuracy : Billing Grade +/-1%

Safety Certificates

CB : IEC 62368-1:2018
UL-US : UL 62368-1, 3rd Ed, 2021-10-22
UL-CA : CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22

EMC Certificates

FCC : FCC 47 CFR Part 15 Subpart B

Environment : RoHS, Reach & WEEE

AUSTIN
HUGHES®

Design. Manufacturing. Global Services.

Copyright 2025 Austin Hughes Electronics Ltd. All rights reserved.

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.