


unit : inch

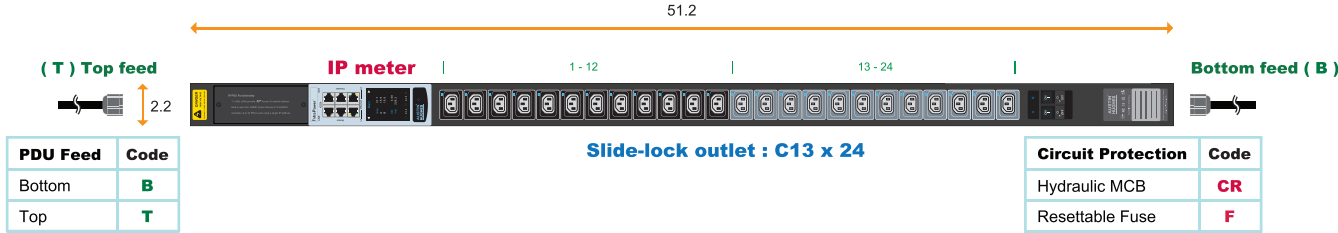

Chassis Color	Code
Black	1
White	2
Red	3
Blue	4
Green	5
Orange	6
Yellow	7
Purple	8

Standard color : Black

30A model	V24L13-30A-ZSi/CR_L630/3B-1	ZSi PDU	Outlet switching & monitoring	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT	Circuit A : 12A max., C13 #1-12 Circuit B : 12A max., C13 #13-24 Outlet with LED only for Outlet switching PDU
	V24L13-30A-ZS /CR_L630/3B-1	ZS PDU	Outlet switching		
	V24L13-30A-Zi /CR_L630/3B-1	Zi PDU	Outlet monitoring		
	V24L13-30A-Z /CR_L630/3B-1	Z PDU	Circuit monitoring		
20A model	V24L13-20A-ZSi/CR_L620/3B-1	ZSi PDU	Outlet switching & monitoring	20A Inlet NEMA L6-20P 10ft Cordset 3W 12AWG UL SJT	Circuit : 16A max., C13 #1-24 Outlet with LED only for Outlet switching PDU
	V24L13-20A-ZS /CR_L620/3B-1	ZS PDU	Outlet switching		
	V24L13-20A-Zi /CR_L620/3B-1	Zi PDU	Outlet monitoring		
	V24L13-20A-Z /CR_L620/3B-1	Z PDU	Circuit monitoring		

Slide Lock Outlet	
Worldwide Patented	
	Black
	Grey
	White
	Red
	Blue
	Green

Standard color
Single circuit : Black
Dual circuit : Black / Grey



Dimension & Weight

ZSi / ZS / Zi PDU	
Product Dimension	: 2.2W x 2.7D x 51.2H (inch)
Packing Dimension (2-in-1)	: 4.3W x 10.6D x 70.1H (inch)
Net / Gross Weight	: 15.9 lb / 18.3 lb
Z PDU	
Product Dimension	: 2.2W x 2.2D x 51.2H (inch)
Packing Dimension (2-in-1)	: 4.3W x 10.6D x 70.1H (inch)
Net / Gross Weight	: 12.7 lb / 15.1 lb

Specification

Operating Temperature	: -5 to 60 °C
Storage Temperature	: -25 to 65 °C
Operating Altitude	: 0 to 2,000 m
Storage Altitude	: 0 to 15,000 m
Humidity (non-condensing)	: 8 to 95% RH
Chassis Material / Color	: Steel / Black

Meter Features		ZSi PDU	ZS PDU	Zi PDU	Z PDU	
	Local Display	: Field replaceable 2.8" color LCD with touchscreen	✓	✓	✓	✓
	Bank Measurement	: Current (A), Energy (kWh), Voltage (V) & Power factor	✓	✓	✓	✓
	Outlet Measurement	: Current (A), Energy (kWh) (Zi & ZSi only)	✓	✓	✓	✓
	Outlet Control	: Outlet Switch ON / OFF (ZS & ZSi only)	✓	✓	✗	✗
	Accuracy	: ±0.5% Billing-grade	✓	✓	✓	✓
	IP Access	: Embedded Dual Gigabit LAN IP	✓	✓	✓	✓
		Dual LAN Network Failover	✓	✓	✓	✓
		Enterprise IP Authentication, LDAPv3 / LDAPS	✓	✓	✓	✓
		Active Directory®, RADIUS, 802.1x	✓	✓	✓	✓
	Protocol	: SNMP V2 V3, Web GUI, Modbus/TCP, RestAPI, LUA	✓	✓	✓	✓
	Cascade	: Up to 32 PDU under single IP address	✓	✓	✓	✓
	Console port x 1	: PDU configuration	✓	✓	✓	✓
	USB-C port x 1	: Wi-Fi connection, firmware update, backup power for meter	✓	✓	✓	✓
Sensor Port x 1	: Temp. Sensor / Temp. + Humid. Sensor / Door Sensor (support daisy chain sensors up to 4)	✓	✓	✓	✓	

Safety Certificates	
CB	: IEC 62368-1:2018
UL-US	: UL 62368-1, 3rd Ed, 2021-10-22
UL-CA	: CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22
EMC Certificates	
FCC	: FCC 47 CFR Part 15 Subpart B
Environment	
: RoHS, Reach & WEEE	