



Drawing & Specification

13 Nov 2025 Version : V3

1-Phase Basic / metered MD PDU
208V 30A : C13 x 8 + C19 x 2 / C13 x 6 + C19 x 4



unit : inch

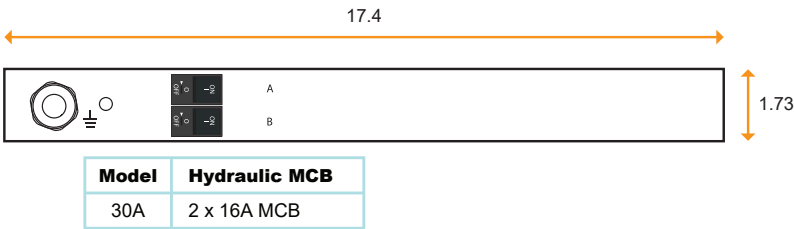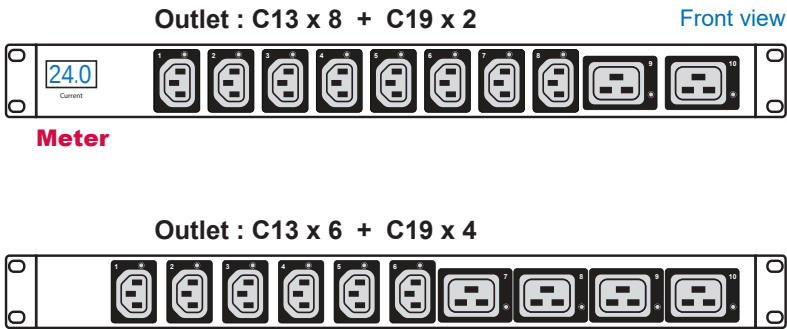

Chassis Color		Code
	Black	1
	White	2
	Red	3
	Blue	4
	Green	5
	Orange	6
	Yellow	7
	Purple	8

Standard color : Black

30A model 5.0 kVA	C13 x 8 C19 x 2	H8C13/2C19-30A-MD/CR_L630/3B-1	MD PDU Local metered	Circuit A : C13 # 1 - 4 + C19 # 9 Circuit B : C13 # 5 - 8 + C19 # 10 Circuit max. Amp. : 12A Circuit A : C13 # 1 - 3 + C19 # 7 - 8 Circuit B : C13 # 4 - 6 + C19 # 9 - 10 Circuit max. Amp. : 12A	30A Inlet NEMA L6-30P 10ft Cordset 3W 10AWG UL SJT
		H8C13/2C19-30A /CR_L630/3B-1	Basic PDU		
	C13 x 6 C19 x 4	H6C13/4C19-30A-MD/CR_L630/3B-1	MD PDU Local metered		
		H6C13/4C19-30A /CR_L630/3B-1	Basic PDU		

Remark : In accordance with the National Electrical Code (NEC), the branch-circuit amperage has been derated to 80% of its rated capacity for continuous loads.



Specification	Meter Features	MD PDU	Basic PDU	Safety Certificates
Operating Temperature : -5 to 60 °C Storage Temperature : -25 to 65 °C Operating Altitude : 0 to 2,000 m Storage Altitude : 0 to 15,000 m Humidity (non-condensing) : 8 to 95% RH Chassis Material / Color : Steel / Black Product Dimension : 17.4W x 4.7D x 1.73H (inch) Packing Dimension : 20.7W x 9.1D x 3.1H (inch) Net / Gross Weight : 6.61 lb / 7.17 lb	 Current Local Display : 3-digit LED ammeter measuring input load current Measurement : Current (A) Accuracy : ± (3% of the reading + 5 digits) RMS	✓ ✓ ✓	✗ ✗ ✗	CB : IEC 62368-1:2018 UL-US : UL 62368-1, 3rd Ed, 2021-10-22 UL-CA : CAN/ CSA C22.2 No. 62368-1:19, 3rd Ed, 2021-10-22 EMC Certificates FCC : FCC 47 CFR Part 15 Subpart B Environment : RoHS, Reach & WEEE