



Benefits

- ▶ 1U 18.5" LCD console drawer
- ▶ 1920 x 1080 native resolution / 16.7M colors
- ▶ HDMI 1.4 + VGA video input (speakers excluded)
- ▶ 104-key USB keyboard with either touchpad or trackball
- ▶ Short depth design of 420mm
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- Dual stereo speakers for HDMI (**HS4.4**)
- DP 1.0 + Speakers (**DP**)
- DVI-D + Audio input & output + Speakers (**DV4.4**)
- Composite + Audio IN + Speakers (**BNC**)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (**SDI**)
- Front USB hub port for device access (**USB**)
- DC power : 12V / 24V / 48V / 125V / 250V
- Touchscreen : Projected Capacitive 10-pt / Resistive 1-pt

Product Specifications

Console Port	
Video input	HDMI 1.4 + VGA
KB / MS	USB interface
VGA console 6ft cable : CB-6A	Drawer end : DB-15 + USB type A x 2
or	Server end : DB-15 + USB type A x 2
HDMI console 6ft cable : CX-6B	Drawer end : HDMI + USB type A x 2
	Server end : HDMI + USB type A x 2

LED-backlit LCD Panel	
Panel size (diagonal)	18.5"
Native resolution	1920 x 1080
Brightness (cd/m ²)	500
Contrast ratio (typ.)	1200 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	85/85/85/85
Response time (ms)	30
Dot pitch (mm)	0.213
Display area (mm)	408.98H x 230.04V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	50,000

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption	Screen on	Max. 14W
	Power saving mode	Max. 2W
	Power button off	Max. 1W

Physical	
Product (W x D x H)	442 x 420 x 44 mm / 17.4 x 16.5 x 1.73 inch
Packing (W x D x H)	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch
Net weight	10.5 kg / 23.2 lb
Gross weight	15 kg / 33 lb

** For the SDI option, the chassis depth is extended to 440mm



Mounting Distance	
Single console drawer	430 ~ 660 mm / 17 ~ 26 inch

Environment	
Operating temp.	-20 to 70°C degree
Storage temp.	-20 to 70°C degree
Operating humidity	10 ~ 90%, non-condensing
Storage humidity	5 ~ 95%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration


Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Standard Keyboard

Ge G keyboard with touchpad

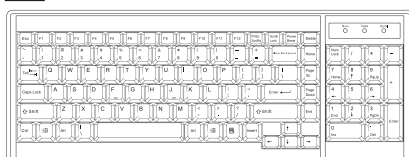

Gb G keyboard with trackball

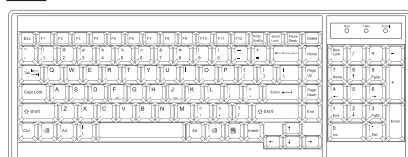

Supporting layouts

America		U.S.
EMEA		U.K. Germany France Spain Italy
Asia		Japan Korea