



Benefits

- ▶ 1U 18.4" 4K LCD console drawer
- ▶ 3840 x 2160@60Hz native resolution/ 1.07B colors
- ▶ Display port 1.2 video input / USB KB/MS
- ▶ 104-key USB keyboard with either touchpad or trackball
- ▶ Built-in dual stereo speakers
- ▶ Short depth design of 420mm
- ▶ One Man installation design
- ▶ Enhanced aesthetics with new molded front panel and 2-point lock
- ▶ 2-year standard warranty (upgradable up to 5 years)
- ▶ TAA Compliant

Options

- HDMI 2.0 video input (**HDMI**)
- 3G / HD / SD-SDI Broadcast-grade input + Speakers (**SDI**)
- Front USB hub port for device access (**USB**)
- DC power : 12V / 24V / 48V / 125V / 250V

Product Specifications

Console Port

Video input	Display port 1.2
KB / MS	USB interface
DP console 6ft cable : CX-6DP	Drawer end : DP + USB type A x 2 Server end : DP + USB type A x 2

LED-backlit LCD Panel

Panel size (diagonal)	18.4"
Native resolution	3840 x 2160@60Hz
Brightness (cd/m ²)	300
Contrast ratio (typ.)	1000 : 1
Colors	1.07B
Viewing angle (L/R/U/D)	85/85/85/85
Response time (ms)	15
Dot pitch (mm)	0.1065
Display area (mm)	408.96H x 230.04V
Surface treatment	Anti-glare
Surface hardness	3H
MTBF (hrs)	30,000

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption	Screen on	Max. 40W
	Power saving mode	Max. 2W
	Power button off	Max. 1W

Physical

Product (W x D x H)	442 x 420 x 44 mm / 17.4 x 16.5 x 1.73 inch
Packing (W x D x H)	590 x 808 x 140 mm / 23.2 x 31.8 x 5.5 inch
Net weight	10.5 kg / 23.2 lb
Gross weight	15 kg / 33 lb

** For the SDI option, the chassis depth is extended to 440mm

Mounting Distance

Single console drawer	430 ~ 660 mm / 17 ~ 26 inch
-----------------------	-----------------------------

Environment



Operating temp.	-20 to 70°C degree
Storage temp.	-20 to 70°C degree
Operating humidity	10 ~ 90%, non-condensing
Storage humidity	5 ~ 95%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance


EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Standard Keyboard

Ge G keyboard with touchpad

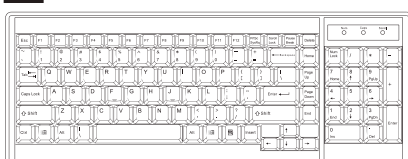

Gb G keyboard with trackball

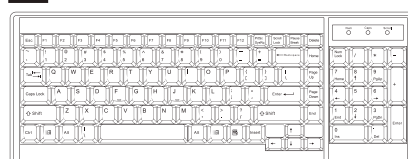

Supporting layouts

America		U.S.
EMEA	    	U.K. Germany France Spain Italy
Asia	 	Japan Korea