# OP-F17 Universal open frame mounting

## Display Benefits

- 17" widescreen LCD with **Full HD** 1080p resolution
- Green LED-backlit panel technology
- Rugged construction against external impact

## Options

- 3G / HD / SD-**SDI** Broadcast-grade input ( w/ speaker )
- **MCS** Multi-display control solution
- Projected Capacitive ( 10-point touch )
  Resistive ( 1-point touch )
- HDMI, S-Video + Composite ( BNC ) or Audio input
- MIL-type or lockable connector
- DC power : 12V / 24V / 48V / 125V / 250V
- TV - Analog

**Basic I/O**




**AV3.0 upgrade I/O with advanced features**




## Specifications

- **LCD Panel**

| | |
|---|---|
| Size (diagonal) : | 17.3" Widescreen TFT |
| Max resolution : | 1920 x 1080 |
| Brightness (cd/m2) : | 400 |
| Backlight : | LED |
| Colors : | 16.7 M, 8-bit |
| Contrast ratio (typ) : | 600 : 1 |
| Viewing angle (H/V) : | 160° x 140° |
| Active area (mm) : | 382 x 215 |
| MTBF (hrs) : | 50,000 |
| Video input : | VGA or DVI-D |

- **Speaker :** Built-in Dual Stereo Speakers 2W x 2
  ( Bundled with AV3.0 upgrade )
- **Power Input :** Auto-sensing 100 to 240VAC, 50 / 60Hz
- **Power Consumption**

| | |
|---|---|
| Sreen on : | Max. 25W |
| Power saving mode : | Max. 4W |
| Power button on : | Max. 1W |

- **Environmental**

| | |
|---|---|
| Operating temperature : | 0 to 55°C degree |
| Storage temperature : | -20 to 60°C degree |
| Operating humidity : | 20~90%, non-condensing |
| Storage humidity : | 5 ~90%, non-condensing |
| Operating altitude : | 16,000 ft |
| Non-operating altitude : | 40,000 ft |
| Shock : | 10G acceleration ( 11ms duration ) |
| Vibration : | 5~500Hz 1G RMS random vibration |

- **Casing Color :** Black ( RAL 9005 )
- **Mounting :** Universal mount / VESA mount
- **Regulatory**

| | |
|---|---|
| Safety : | FCC & CE certified |
| Environmental : | RoHS2 & REACH compliant |

- **Weight**

| | |
|---|---|
| Net : | 3.4 kgs / 7.5 lbs |
| Gross : | 6.2 kgs / 13.6 lbs |

- **Dimensions**

| | |
|---|---|
| Product : | 465.5 x 50.6 x 328 mm / 18.3 x 2 x 12.9 inch |
| Packing : | 615 x 113 x 523 mm / 24.2 x 4.4 x 20.6 inch |

## Diagrams ( mm )

Front View

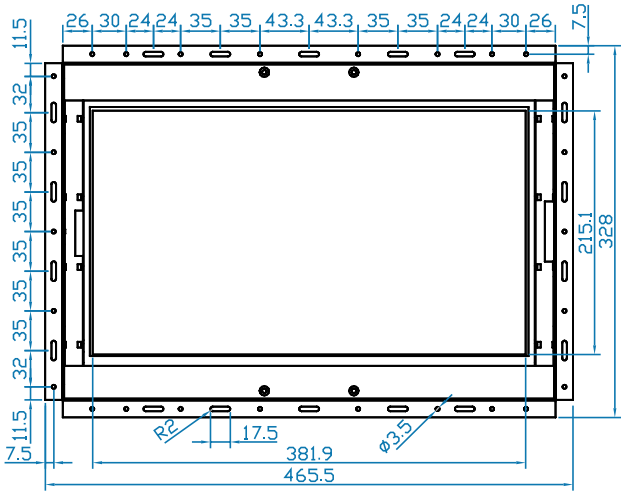


Side View

Rear View

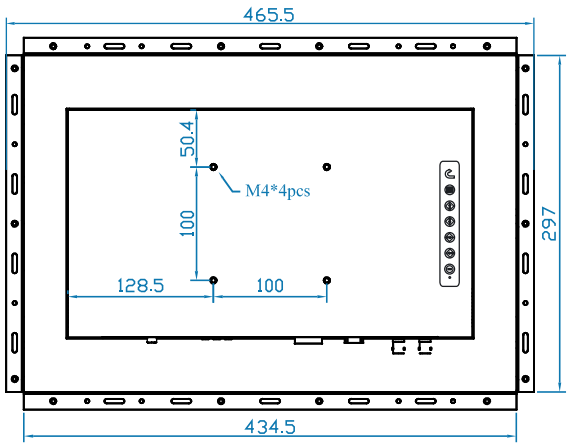


**Dimension will be changed if Multi-touch required

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.
Copyright 2017 Austin Hughes Electronics Ltd. All rights reserved.