

NAP-M30

NEMA 4 / IP65
front protection



Display Benefits


- ▶ 30" ultra widescreen LCD with 2560 x 1600 native **WQXGA** resolution
- ▶ PIP & Picture by Picture viewing efficiency
- ▶ 6mm aluminum front bezel with protective glass & water proof sealed gasket
- ▶ Green LED-backlit panel technology
- ▶ 10-bit LCD delivers 1.07 billion true color
- ▶ Standard with Display port, HDMI, Dual-link DVI-D, VGA & remote controller

Options

- MIL-type or lockable connector
- DC power : 24V / 48V



Basic I/O



Specifications

• LCD Panel

Manufacturer :	LG
Size (diagonal) :	30" Widescreen TFT
Max resolution :	2560 x 1600
Brightness (cd/m ²) :	350
Backlight :	LED
Colors :	1.07 Billion, 10-bit
Contrast ratio (typ) :	1000 : 1
Viewing angle (H/V) :	178° x 178°
Active area (mm) :	641 x 401
MTBF (hrs) :	30,000
Video input :	Display Port 1.2 / HDMI 1.4 / Dual-link DVI-D / VGA

• Speaker :

Built-in Dual Stereo Speakers (10W x 2)

• Power Input :

Auto-sensing 100 to 240VAC, 50 / 60Hz

• Power Consumption

Sreen on :	Max. 70W
Power saving mode :	Max. 5W
Power button on :	Max. 2W

• Environmental

Operating temperature :	0 to 55°C degree
Storage temperature :	-20 to 60°C degree
Operating humidity :	20~90%, non-condensing
Storage humidity :	5 ~90%, non-condensing
Operating altitude :	16,000 ft
Non-operating altitude :	40,000 ft
Shock :	10G acceleration (11ms duration)
Vibration :	5~500Hz 1G RMS random vibration

• Casing Color :

Black (RAL 9005)

• Mounting :

Wall-mount / VESA mount

• Regulatory

Safety : FCC & CE certified

• Weight


Net :	21.9 kgs / 48.2 lbs
Gross :	26.8 kgs / 59 lbs

• Dimensions

Product :	743.9 x 77.5 x 503.4 mm / 29.3 x 3.1 x 19.8 inch
Packing :	To be confirmed

Diagrams (mm)

Front View

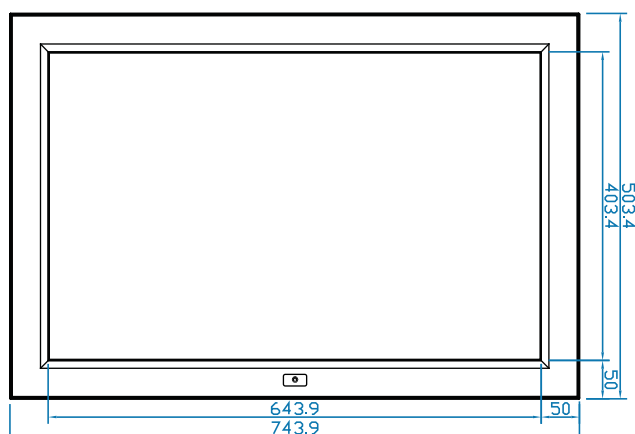

Side View



Rear View

